

34D Electronic Pressure Sensor for Pneumatic & Allfluid Applications

Visible switch-
point LEDs

Programmable
2-colour display

IO-Link

Robust

Ceramic capacitive
measuring cell



CONTENTS

Introduction	02
Electronic Pressure Sensors	03
34D Electronic Pressure Sensor with IO-Link	04
Technical Specifications	06
Standard Options	06
Accessories	07

Breakthrough Engineering for a Better World

We create solutions for our customers which enable smarter, safer, more productive and sustainable factories, production lines and warehouse operations. Our pneumatic and electric motion systems help machine builders and end users around the world automate and optimize manufacturing and warehousing processes.

We have partnered with customers in industrial automation for over a century, applying our experience and innovation to create lasting value for their businesses. Our solutions support critical industries such as automotive, food and beverage, pharmaceuticals and even the space industry. We support the automation of precision manufacturing, product assembly, testing and packaging.

We use the latest digital technologies in our automation products and constantly innovate in close partnership with our customers. By applying our deep expertise, we can solve their toughest automation challenges, today and tomorrow. Through increased productivity, efficiency and safety, our customers can serve their own customers better, creating sustainable competitive advantage and delivering growth.

Our world-class product portfolio includes IMI Norgren, IMI Bimba and IMI Bahr.

Breakthrough engineering you can count on.

Electronic Pressure Sensors

Pressure sensing technology is critical when pressure monitoring for plant security, or pressure control for high level functionality are needed in an application.

Pressure sensors can be used to automatically monitor pressure levels in a pneumatic system, or be used for more complex monitoring functions in air, water, hydraulic or any allfluid fluid applications.

We can offer our customers over 50 years of pressure switch and sensor technology experience and expertise to find the appropriate solution for our customers.

Electronic pressure sensors are particularly suitable in applications where the classic mechanical pressure switch is not suitable.


Offering benefits in accuracy, life span and functionality the IMI Norgren range is suitable for modern manufacturing technologies. Pressure set points are programmable either manually or remotely via IO-Link, with high levels of visibility via LEDs and digital displays.



Breakthrough
Engineering
for a Better World




34D Electronic Pressure Sensor with IO-Link



The IMI Norgren 34D pressure sensor has a robust stainless steel body with G1/4 media connection port and M12 electrical connection, and is ideally suited for aggressive process control environments.

Product Highlights:

- **Easy installation** – Body rotatable by 345 degrees relative to the body for easy alignment of the display during installation
- **Connected** – IO-Link capability allows remote set-up and access to application performance data for improved system monitoring
- **Simple set-up** – Easy and quick manual set up via three push buttons, or remotely via IO-Link
- **Easy to use** – Large 10mm, two color programmable display to easily identify switching status. LED status indicators can be viewed from rear.
- **Universal** – Pneumatic and Allfluid process media in single product series with 9 different pressure range options from vacuum to 600 bar, making it suitable for all applications
- **Robust** – Stainless steel (1.4404 / 316L) body with laser etched labeling and IP67 ingress protection
- **Reliable** – Ceramic capacitive measuring cell provides for very high over pressure capability such as occurs with water hammer and cavitation (dynamic pressure peaks).
The measuring cell is also very good at handling aggressive or abrasive media.

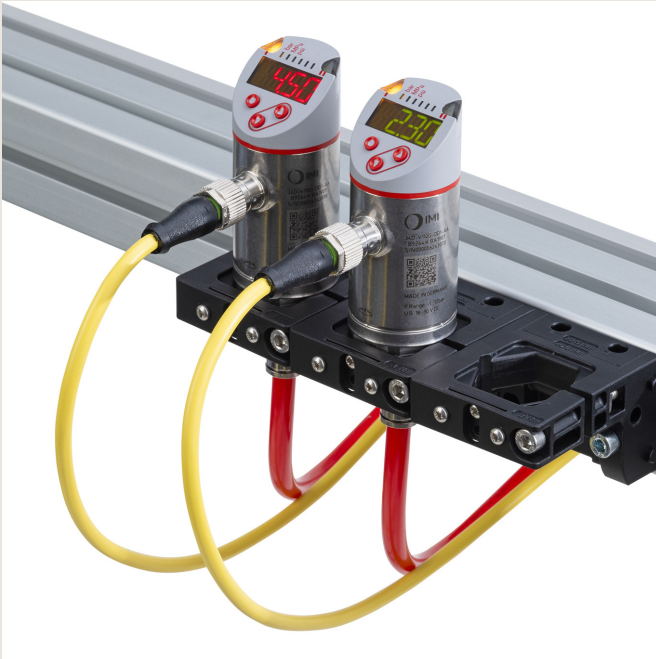

Gang mounting option using modular brackets



IO-Link Capability



Easy to use



Easy Installation with housing rotatable through 345°

Technical Specifications

- Suitable for aggressive environments – robust stainless steel body with FKM sealing and laser etched label
- Ceramic capacitive measuring cell
- Connection cable with straight or angled M12 connector
- Vacuum to 8,702 psi pressure ranges
- -13°F to 176°F operating temperature
- High accuracy $< \pm 0.5\%$ of span
- Fast response time < 3 ms
- High shock and vibration resistance 50 g (11 ms), 20 g (10 ... 2000 Hz)
- Two output options
 - 2 x PNP / NPN (1 x IO-Link configurable)
 - 1 x PNP (IO-Link configurable), 1 x Analogue 4.20 mA / 0.10 v
- Process connection rotatable by 345° relative to the body for easy alignment
- Status LEDs indicate units of measure
- Switching point LEDs visible from 360°
- Angled display for easier visibility and operation
- Parameter setting options:
 - Lower overall weight of machine
 - hysteresis
 - window; normally open
 - normally closed; analogue output; IO-Link
- Ingress protection up to IP67


Accessories

The 34D pressure sensor is supported by a large range of cables, mounting brackets and flange adaptors.

Mounting brackets and flange adaptors



Angle mounting bracket

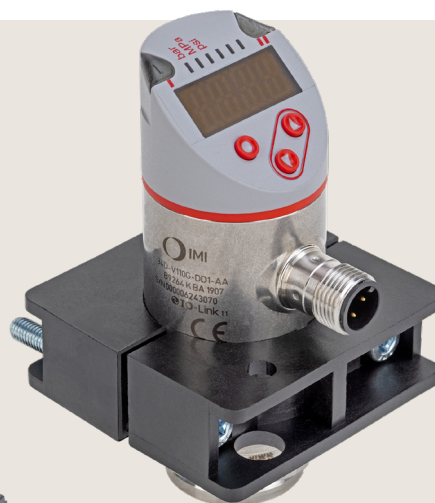


Mounting clamp

Standard Options

Standard Model	Description	Port Size	Pressure Range	Over Pressure	Output Signals
34D-V101G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	-1 ... 1bar	10 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-V101G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	-1 ... 1bar	10 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-V110G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	-1 ... 10bar	75 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-V110G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	-1 ... 10bar	75 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P016G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 16bar	85 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P016G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 16bar	85 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P040G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 40bar	200 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P040G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 40bar	200 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P100G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 100bar	300 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P100G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 100bar	300 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P160G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 160bar	350 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P160G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 160bar	350 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P250G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 250bar	500 Bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P250G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 250bar	500 Bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P400G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 400bar	800 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P400G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 400bar	800 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)
34D-P600G-DD1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 600bar	800 bar	2 x PNP/NPN (1 x IO-Link configurable)
34D-P600G-DA1-AA	34D Pressure Sensor with IO-Link	G1/4	0 ... 600bar	800 bar	1 x PNP (IO-Link configurable), 1 x analogue (4...20mA, 0...10V)

Accessory Model	Description
34D-BRKT-BODY	34D Bracket - Body
34D-BRKT-ANGLED	34D Bracket - Angled
34D-COVER-PROTEC	34D Protective Cover
34D-LABEL-TAG	34D Label Tag
34D-DAMPING-SCRW	34D Damping Screw
34D-FLANGE-ADPT	34D Flange Adaptor
34D-14G-G-ADPT	34D Adaptor G1/4 ... G1/4
34D-14G-NPT-ADPT	34D Adaptor G1/4 ... 1/4NPT
0523057000000000	Connector M12 x 1 Straight x 2 m Long
0523052000000000	Connector M12 x 1 Straight x 5 m Long
0523055000000000	Connector M12 x 1 Straight - Wireable Without Cable
0523058000000000	Connector M12 x 1 Angled x 2 m Long
0523053000000000	Connector M12 x 1 Angled x 5 m Long
0523056000000000	Connector M12 x 1 Angled - Wireable Without Cable

Cables



Cable M12 x 1
4-pin, straight

Protective cover




Cable M12 x 1
4-pin, 90°



Process connection adaptors

G1/4 - G1/4



G1/4 - 1/4 NPT

Our Industrial Automation sector operates four global centers of technical excellence and a sales and service network in 50 countries, as well as manufacturing capability in Europe, Americas and Asia Pacific.

Supported by distributors worldwide.

For further information, scan this QR code or visit:

www.imiplc.com/industrial-automation



Industrial Automation

Our product brands:

IMI Norgren

IMI Bimba

IMI Bahr

The information in this brochure is provided for informational and promotional purposes only and is provided "as is" and without warranties of any kind, whether express or implied, including but not limited to implied warranties of satisfactory quality, fitness for a particular purpose and/ or correctness.

© Copyright IMI plc. All rights reserved.

z9542BR en/03/25

